



imageRUNNER C3226i

RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOUR A3 MULTIFUNCTION PRINTER

Maximise uptime and simplify maintenance with unrivalled device durability



PRODUCTIVITY



SECURITY



**CONTROL AND
MAINTENANCE**



USER EXPERIENCE



**CLOUD
CONNECTIVITY**



SUSTAINABILITY

Canon

imageRUNNER C3226i

PRODUCTIVITY

- Fast warm-up time starts print production more quickly
- Print a wide variety of media types and sizes, continuously in high-volume
- Personalise the user display configuration to enhance document processing efficiency
- Streamline document post-production with optional finishing options, including eco-staple, staple and punch

USER EXPERIENCE

- Easy to use 7-inch/17.8cm touchscreen provides excellent visibility and usability for intuitive handling
- Optimise print, copy, scan and send document workflows to one-touch operation
- Combine multiple settings into one button for super-fast document processing
- Repeat previous jobs at the touch of a button with Timeline setting history

SECURITY

- Protect data and documents with PDF encryption, Forced Hold print and user authentication
- Guard device systems from unknown threats with embedded McAfee Protected Control
- Safeguard your network and cloud with secure connections to external devices
- Streamline security management with SIEM support, audit logs and auto certificate update

CLOUD CONNECTIVITY

- Save scanned documents to your email or Google Drive/Google Workspace using personalised workflows with uniFLOW Online Express
- File Assist automatically names, sorts and create a folder structure for files
- Print wirelessly from mobile devices, with support for Apple AirPrint and Mopria
- Add extra functionality to mobile printing and scanning with Canon's PRINT Business app

CONTROL AND MAINTENANCE

- Reduce administrative burden with remote diagnostics, automated meter readings and consumables monitoring
- Automatic firmware updates keep devices up to date with the latest features
- Limit private use and paper waste, plus centrally manage user login information, with batch management

SUSTAINABILITY

- Edit print settings at device-level to reduce paper and toner wastage
- Converting document to digital files minimises paper usage
- Eco-stapling option allows for further reduction of consumables
- Energy saving features, such as Sleep Mode help to decrease power consumption

QUICK FACTS

- Print, Copy, Scan and Send
- 7-inch/17.8cm WVGA colour touchscreen
- One-touch operation with Timeline and Shared/Personal buttons
- Print speed of up to 26ppm
- Support for a wide range of media types and sizes
- uniFLOW Online Express* cloud-based print management solution
- Automatic file naming, sorting and folder structure with Filing Assist**

- Document, device and network security from McAfee Protected Control, TLS1.3 and SIEM support
- Easy maintenance with automatic firmware updates
- Finishing options include eco staple, staple and punch

*requires activation

**available with subscription to uniFLOW Online Cloud based print management solution

SERVICES

CORE

Perform routine office operations safely and with ease, utilising embedded software including uniFLOW, Microsoft Universal Print and other available services offering complete device maintenance and support



HARDWARE



SOFTWARE



SERVICES

BESPOKE

Choose a tailored service to suit your business needs by removing unnecessary print management burdens. Consult with Canon experts about your specific requirements to find a fitting Print Managed Services option

ENHANCED

Expand cloud capabilities with uniFLOW, Canon's all-in-one print management system



Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co. Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie


Canon (UK) Ltd
5 The Square
Stockley Park
Uxbridge
UB11 1ET
Tel: 01895 648 000
www.canon.co.uk

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2021

imageRUNNER C3226i

RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOUR A3 MULTIFUNCTION PRINTER

MAIN CONFIGURATION OPTIONS

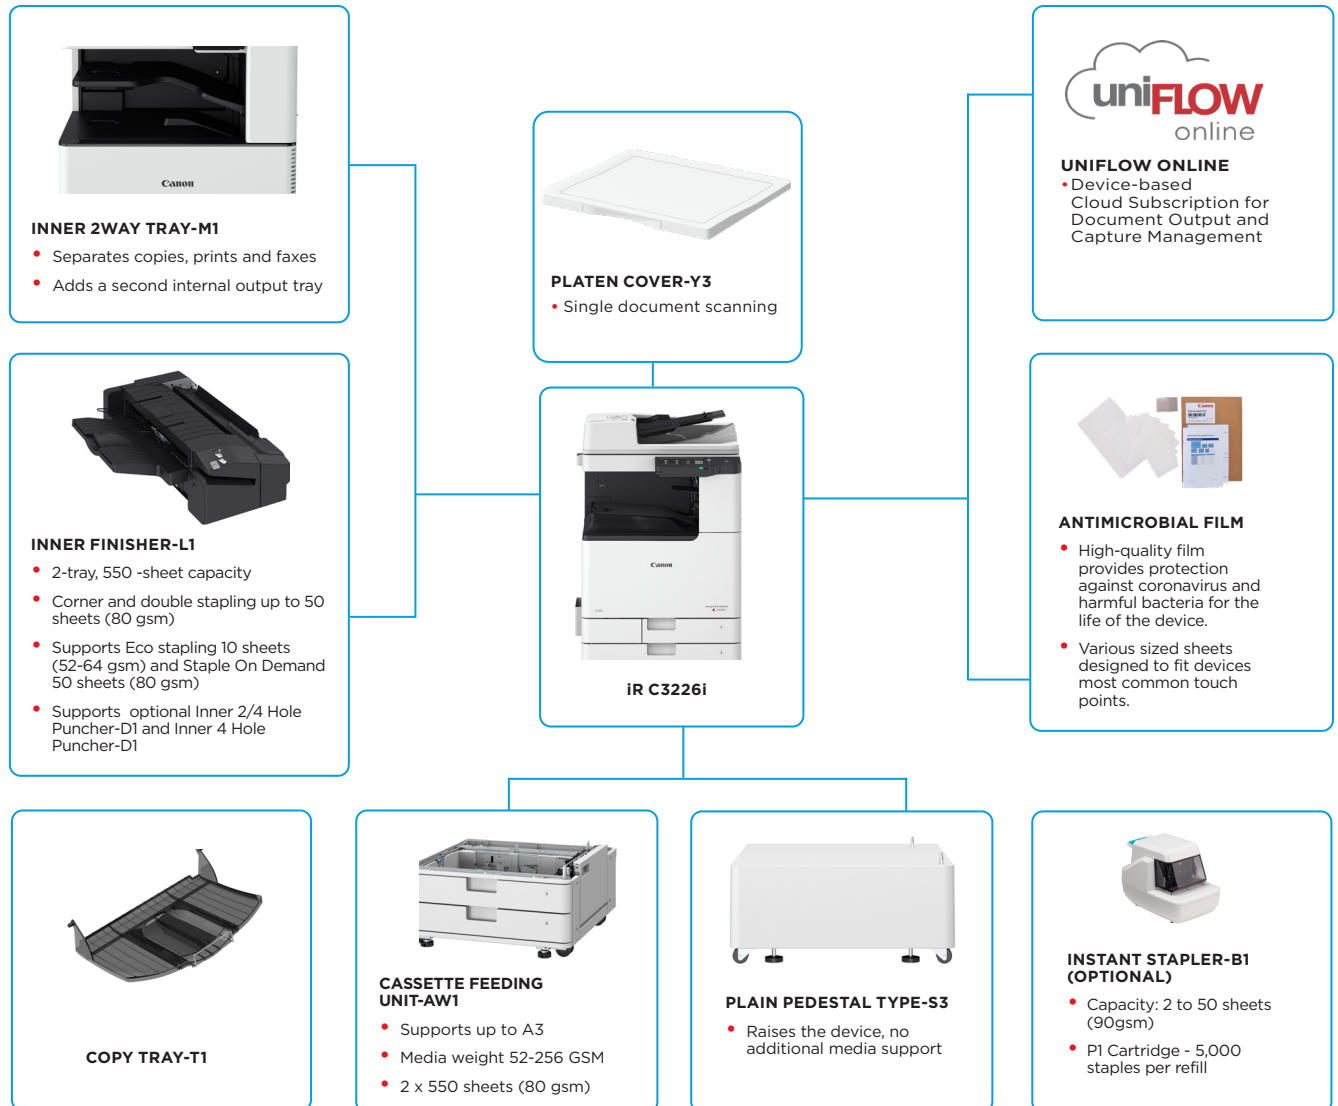

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#)

TECHNICAL SPECIFICATIONS

imageRUNNER C3226i

MAIN UNIT

Machine type	A3 Colour Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	1GHz Dual Core Processor
Control Panel	17.8 cm/7 inch TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	Standard: 64GB eMMC (available space 30GB)
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE802.11b/g/n) OTHERS Standard: USB 2.0 (Host) x 2, USB 2.0 (Device) x 1

Paper Supply capacity (A4, 80gsm)

Standard: 1,200 Sheets
Maximum: 2,300 Sheets
(with optional Cassette Feeding Unit-AW1)

Paper output capacity (A4, 80gsm)

Standard: 250 Sheets
Maximum: 650 Sheets
(with optional Inner Finisher-L1 and Copy Tray-T1)

Finishing capabilities

Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand
* Finishing capabilities vary, depending on the options selected

Supported Media Types

Multi-purpose Tray:
Thin, Plain, Heavy*, Recycled, Coated, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope
* SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper
Upper Cassette:
Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope*
* Envelope Feeder Attachment Kit B (standard) is required.
Lower Cassette:
Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Letterhead, Envelope*
* Envelope Attachment Kit A (standard) is required.

Supported media sizes

Multi-purpose tray:
Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm
Envelopes: COM10 No.10, Monarch, ISO-C5, DL
Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm
Upper Cassette:
Standard size: A4, A5, A5R, A6R, B5
Custom size: 105.0 x 148.0 mm to 297.0 x 215.9 mm
Envelope: ISO-C5
* Envelope Feeder Attachment Kit B (standard) is required.
Lower Cassette:
Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R
Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm
Envelope*: COM10 No.10, Monarch, DL
* Envelope Attachment Kit A (standard) is required.

Supported media weights

Multi-purpose tray: 52 to 300 gsm
Upper/Lower Cassette: 52 to 256 gsm
Duplex: 52 to 220 gsm

Warm-Up Time (Quick start mode:ON)

4 Seconds or Less*
*Time from device power on to when copy icon appears and is enabled to operate on the touch panel display
From Sleep Mode: 10 Seconds or Less
10 Seconds or Less*
*Time from device power on, until copy ready (not print reservation)

Dimensions (W x D x H) Installation Space (W x D) Weight

565 x 687 x 891 mm
1168 x1116 mm
Approx. 74.7 kg including toner

PRINT SPECIFICATIONS

Print Speed

1-sided (BW/CL):
Up to 26/26 ppm (A4, A5, A5R,A6R), Up to 20/20 ppm (A4R).Up to 15/15 ppm (A3)

2-sided (BW/CL):
Up to 26/26 ipm (A4, A5R), Up to 20/20 ipm (A4R), Up to 15/15 ipm (A3)

Print Resolution (dpi)

Up to 1200 x1200

Page description languages

Standard: UFR II, PCL6
Optional: Adobe® PostScript®3™

Direct Print

Supported file types:

RUI: PDF, EPS, TIFF/JPEG, XPS
USB Memory: PDF, TIFF/JPEG, XPS
Network Place: PDF, TIFF/JPEG, XPS

Printing from mobile and cloud

AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print by Microsoft
A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

OS Standard Printing

Android/Windows® 10/Chrome OS/macOS (11.2.2) /iOS/ iPadOS

Fonts

As of Mar. 2021
PS fonts: 136 Roman
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT
J/K/S/T*¹ (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*²

*¹ Requires optional PCL INTERNATIONAL FONT SET-A1

*² Requires optional BARCODE PRT KIT-D1

Print Features

Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer

Operating System

UFR II: Windows® 8.1/10/Server 2012/Server 2012 R2/ Server 2016/Server 2019, MAC OS X (10.11 or later)
PCL: Windows®8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019
PS: Windows®8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.11 or later)
PPD: Windows® 8.1/10, MAC OS X (10.11 or later)

As of March, 2021

COPY SPECIFICATIONS

Copy Speed

1-sided (BW/CL):
Up to 26/26 ppm (A4, A5, A5R, A6R), Up to 20/20 ppm (A4R).Up to 15/15 ppm (A3)
2-sided (BW/CL):
Up to 13/13 ppm (A4, A5R), Up to 10/10 ppm (A4R), Up to 7/7 ppm (A3)

First-Copy-Out Time

(A4, BW/CL): Approx. 7.0 / 8.7 seconds or less
600 × 600

Copy resolution (dpi)

Multiple Copies

Up to 999 copies

Copy Density

Automatic or Manual (9 Levels)

Magnification

25% - 400% (1% Increments)
Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%

Copy Features

Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Colour Mode, Reserved copy, Copy Sample

SCAN SPECIFICATIONS

Type

Standard: Duplexing Automatic Document Feeder [2-sided to 2-sided]
Optional: Platen Cover-Y3

Document Feeder Paper Capacity (80 gsm)

Up to 100 sheets

Acceptable Originals and weights

Platen: Sheet, Book and 3-Dimensional objects

Document Feeder media weight :

1-sided scanning: 30 to 128 gsm (BW), 64 to 128 gsm (CL)

2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

Platen: max. scanning size: 297.0 x 431.8 mm

Document Feeder media size:

A3, A4, A4R, A5, A5R, B4, B5, B5R, B6

Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm

Supported media sizes

TECHNICAL SPECIFICATIONS

imageRUNNER C3226i

Scan Speed	DADF (ipm: BW/CL, A4): 1-sided Scanning: 70/70 (300 dpi, send), 51/42 (600 dpi, copy) 2-sided Scanning: 35/35 (300 dpi, send), 25.5/25.5 (600 dpi, copy)	SECURITY SPECIFICATIONS	
Scan Resolution (dpi)	Scan for Copy: up to 600 x 600 Scan for Send: (Push,BW) up to 600 x 600, (Pull,BW) up to 600 x 600, (Push,CL) up to 300 x 300, (Pull,CL) up to 300 x 300 Scan for Fax: up to 600 x 600	Authentication and Access Control	User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows* 8.1/ 10/ Server2012/ Server2012 R2/ Server 2016/ Server 2019	Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Recieve Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/ XPS, User Signature PDF/XPS*), Send Data Security (Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support) *Requires optional uniFLOW Online / uniFLOW **Requires optional Universal Send Digital User Signature Kit-C1
Scan Method	PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud-based services (uniFLOW Online/Online Express)	Network Security	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/ Wireless LAN, Wired LAN/Wired LAN), Disabling/ Enabling (Network Protocols/Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception
SEND SPECIFICATIONS		Device Security	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Verify System at Startup, Runtime Intrusion Detection
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Optional: Super G3 FAX	Device Management and Auditing	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting
Address Book	LDAP (2,000)/ Local (1,600) /Speed dial (200)	ENVIRONMENTAL SPECIFICATIONS	
Send resolution (dpi)	Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400*(SuperFine), 300 x 300, 400 x400*(UltraFine), 600 x 600* Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600* *Colour mode is black and white only	Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity) 220-240V 50/60Hz 4A
Communication protocol	File: FTP (TCP/IP), SMB 3.0 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)	Power source	Maximum: Approx. 1,500 W Standby: Approx. 44 W* ¹ Sleep mode: Approx. 2.0W* ² , Approx. 1.0W* ³
File Format	Standard: TIFF (MMR), JPEG *, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only	Power consumption	* ¹ Reference value: measured one unit. * ² Wireless LAN power serve mode OFF * ³ Wireless LAN power serve mode ON * ²⁺³ Sleep mode is not available in all circumstances due to certain settings.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation	Noise levels (BW/CL)	Typical Electricity Consumption (TEC)*: 0.34 kWh Note: As per US Energy Star 3.0 <u>Sound Power Level (LWA,m)</u> Active (1-sided) : 6.0B* ¹ , 0.3B* ¹ <u>Sound Pressure Level (LpAm)</u> Bystander's position: Active (1-sided) : 46 dB* ¹ * ¹ Reference value: measured only one unit with ISO7779, described with ISO9296:2017 Blue Angel (Applied for)
FAX SPECIFICATIONS		Standards	
Maximum Number of Connection Lines	1	CONSUMABLES	
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	Toner Cartridge	C-EXV 54 Toner BK/C/M/Y
Compression Method	MH, MR, MMR, JBIG	Toner Yield	(Estimated Yield @ 5% Coverage) C-EXV 54 TONER BK: 15,500 pages C-EXV 54 TONER C/M/Y: 8,500 pages
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)		
Sending/Receiving Size	Sending: A3, A4, A4R, A5* ¹ , A5R* ¹ , B4, B5* ² , B5R* ¹ Receiving: A3, A4, A4R, A5R, B4, B5, B5R * ¹ Sent as A4 * ² Sent as B4 short		
FAX memory	Up to 30,000 pages		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox		
STORE SPECIFICATIONS			
Memory Media	Standard: USB Memory		

TECHNICAL SPECIFICATIONS

imageRUNNER C3226i

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting Remote management tools

uniFLOW Online Express
iW Management Console
eMaintenance
Content Delivery System

Scanning software

ScanGear

PAPER SUPPLY OPTIONS

Cassette Feeding

Cassette Feeding Unit-AW1:

Paper Capacity: 550 sheets x 2 (1,100 sheets) (80 gsm)
Paper Type: Thin, Plain, Recycled, Colour, Heavy, Bond,
Transparency, Pre-punched, Letterhead
Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,
Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm
Paper Weight: 52 to 256 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 565 x 635 x 248 mm
Weight: Approx. 16.0 kg

OUTPUT OPTIONS

Inner Tray

Inner 2way Tray-M1:

Tray Capacity (80 gsm paper)
Upper tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4,
B5, B5R: 100 sheets
Lower tray (standard tray): A4, A5, A5R, A6R, B5,
B5R: up to 250 sheets
SRA3, A3, A4R, B4: up to 100 sheets
Paper Weight: 52 to 300 gsm
Dimensions (W x D x H): 428 x 405 x 88 mm
Weight: Approx. 0.7 kg

Copy Tray

Copy Tray-T1:
Capacity (with 80gsm paper):
A4, A5R, B5, B5R: 100 sheets
A3, A4R, B4: 75 sheets
Dimensions (W x D x H): 442 x 373 x 176 mm
(attached to the main unit, when the extension tray is
extended)
Weight: Approx. 0.5kg

Inner Finisher

Inner Finisher-L1:

Tray Capacity (with 80gsm paper):
Upper Tray: A4, A5, A5R, B5: approx. 50 sheets
SRA3, A3, A4R, A6R, B4, B5R: approx. 50
sheets
Lower Tray: A4, A5, A5R, B5: approx. 500 sheets
SRA3, A3, A4R, B4, B5R: 250 sheets
A6R: 30 sheets
Envelope: 10 sheets
Paper Weight: 52 to 300 gsm
Staple Position: Corner, Double
Staple Capacity:
A4, B5: 50 sheets (52 to 90 gsm)
A4R : 40 sheets (52 to 90 gsm)
A3, B4: 30 sheets (52 to 90 gsm)
Eco Staple:
A3, A4, B4, B5: 10 sheets (52 to 64 gsm)
8 sheets (65 to 81.4 gsm)
6 sheets (82 to 105 gsm)
Staple On Demand: approx. 40 sheets (80 gsm)
Dimensions (W x D x H): 575 x 525 x 225 mm (when
the extension tray is extended)
Weight: Approx. 9.1 kg

Inner 2/4 Hole Puncher

Inner 2/4 Hole Puncher-D1 (Requires Inner
Finisher-L1):
Two or Four Holes
Acceptable Punch Paper Weight: 52 to 300 gsm
Acceptable Punch Paper Size:
Two holes: A3, A4, A4R, A5, B4, B5, B5R,
Four holes: A3, A4

Inner 4 Hole Puncher

Inner 4 Hole Puncher-D1 (Requires Inner
Finisher-L1):
Four Holes
Acceptable Punch Paper Weight: 52 to 300 gsm
Acceptable Punch Paper Size: A3, A4, A4R, A5,
B4, B5, B5R

HARDWARE ACCESSORIES

Card Readers

Copy Card Reader Attachment-H3
IC Card Reader Attachment-B3
Copy Card Reader-F1
IC Card Reader Attachment-B4
Option Attachment kit for Reader-A2
Platen Cover-Y3

Others

SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1
PS Printer Kit-CS1

Send Options

Universal Send Trace & Smooth PDF Kit-A1
Universal Send Digital User Signature Kit-C1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-D1

Fax Accessories

Super G3 FAX Board-BJ1
Remote Fax Kit-A1

OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1
Media Adjustment kit-A1

Staple Cartridges

Staple-P1

Software & Solutions



Compatibility



Canon Ireland
3006 Lake Drive
Citywest, Saggart
Co. Dublin, Ireland
Telephone No: 01 2052400
Facsimile No: 01 2052525
canon.ie

Canon (UK) Ltd
5 The Square
Stockley Park
Uxbridge
UB11 1ET
Tel: 01895 648 000
www.canon.co.uk

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
© Canon Europa N.V., 2021